



# Conflux

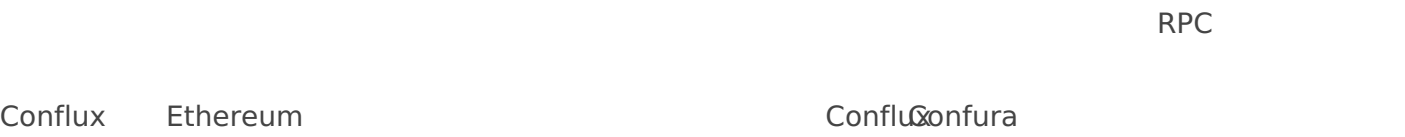

## Target



- RPC epoch RPC :
- epoch < target , catch-up mode,
  - target 1s

epoch RPC

### a. epoch block hash

`cfx_getBlocksByEpoch` epoch block hash pivot block hash

### b. block hash block/transaction

`cfx_getBlockByHashWithPivotAssumption` reorg pivot block hash

\* block epoch block hash

### c. epoch transaction receipts

- transaction receipts:
- block `cfx_getTransactionReceipt` receipts

- pivot block hash `sh_getEpochReceipts` epoch receipts, `fullnode debug`  
`public_rpc_api` pivot block hash pivot chain switch  
 hash txn hash

d.

# Reorg

- pivot chain switch reorg epoch epoch pivot
- Pubsub epochs latest state epoch epoch epoch epoch
- epoch parent hash epoch pivot hash epoch number

---

Revision #5  
 Created 29 June 2022 10:45:00 by Pana  
 Updated 29 June 2022 10:52:32 by Pana