



Conflux

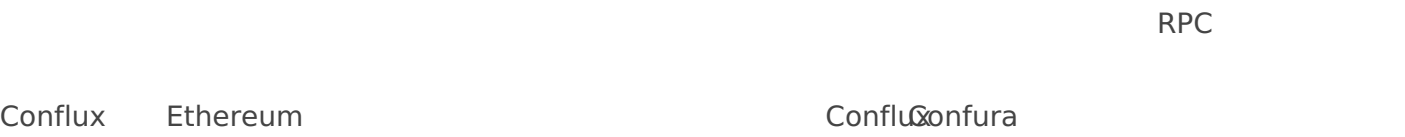

Target



- `RPC epoch` `RPC :`
- `epoch < target` , `catch-up mode,`
- `target` `1s`

`epoch` `RPC`

a. *epoch block hash*

`cfx_getBlocksByEpoch` `epoch` `block hash` `pivot block hash`

b. *block hash block/transaction*

`cfx_getBlockByHashWithPivotAssumption` `reorg` `pivot block hash`

* `block` `epoch` `block hash`

c. *epoch transaction receipts*

`transaction receipts:`

- `block` `cfx_getTransactionReceipt` `receipts`

- pivot block hash `sh_getEpochReceipts` epoch receipts, `fullnode debug`
`public_rpc_api` pivot block hash pivot chain switch
 hash txn hash

d.

Reorg

- pivot chain switch reorg epoch epoch pivot
- Pubsub epochs latest state epoch epoch epoch epoch
- epoch parent hash epoch pivot hash epoch number

Revision #5
 Created 29 June 2022 10:45:00 by Pana
 Updated 29 June 2022 10:52:32 by Pana